







**Hidro  
Pnevmotekhnika**

3. Vojeli St., Kazanlak, Bulgaria  
Tel.: +359 431/62 228  
Fax.: +359 431/62 019  
e-mail : info@hpt-bg.com  
www.hpt-bg.com

## 3/2 DIRECTIONAL SOLENOID-OPERATED VALVE

**RHB06- .. / ...**

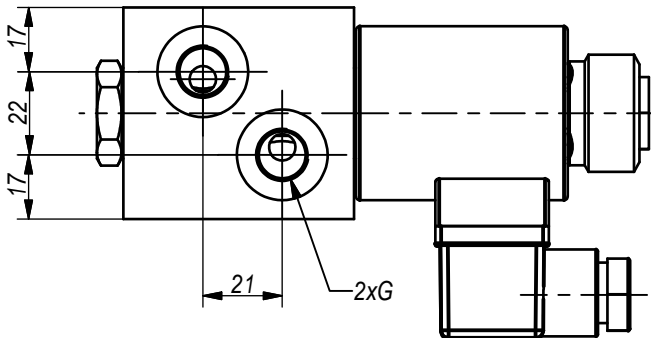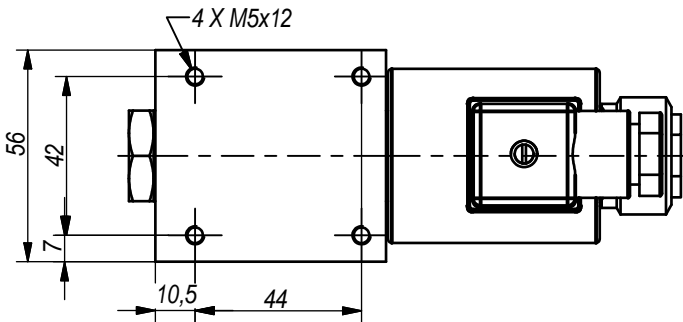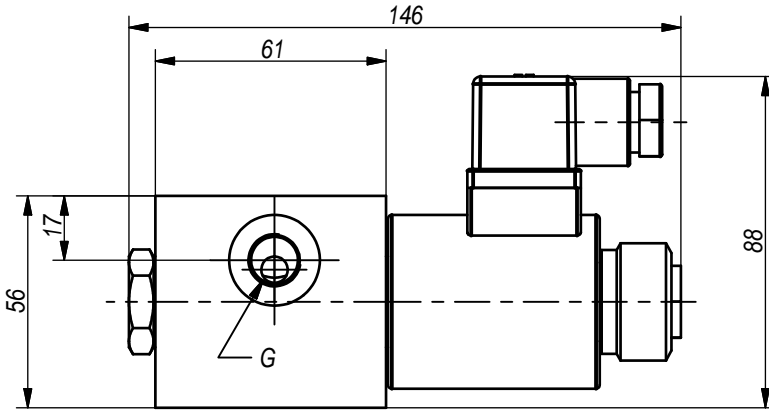

**Note:**

1. All performances and calibration are carried out by using hydraulic oil with viscosity approx 46 cSt at 50 °C.
2. Tightening torque for solenoid - 25 N.m.

TECHNICAL DATA		
General		
Ambient temperature	°C	-20...+50
Hydraulic		
Nominal pressure	bar	200
Nominal flow rate	L/min	30
Working fluid – mineral oil		
- viscosity	mm <sup>2</sup> /s	10...100
- filtration level	µm	25 or better
- temperature	°C	-20...80
Elektrical		
Voltage of operating solenoid	V DC	12 24
	V AC	110/50Hz 220/50Hz

### ORDERING CODE

**RHB06 - .. / 12 P**

