Hidro
Pnevmo
Tehnika

3, Vojeli St., Kazanlak, Bulgaria
Tel.: +359 431/62 228
Fax.:+359 431/62 019
e-mail: info@hpt-bg.com
www.hpt-bg.com

HYDRAULIC MOTOR BLOCKS
TYPE BV

BVR 12 09/.. .-.. .

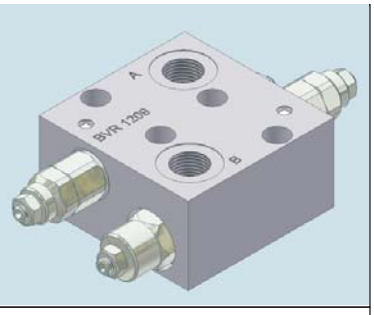

Code	Hydraulic scheme
09	

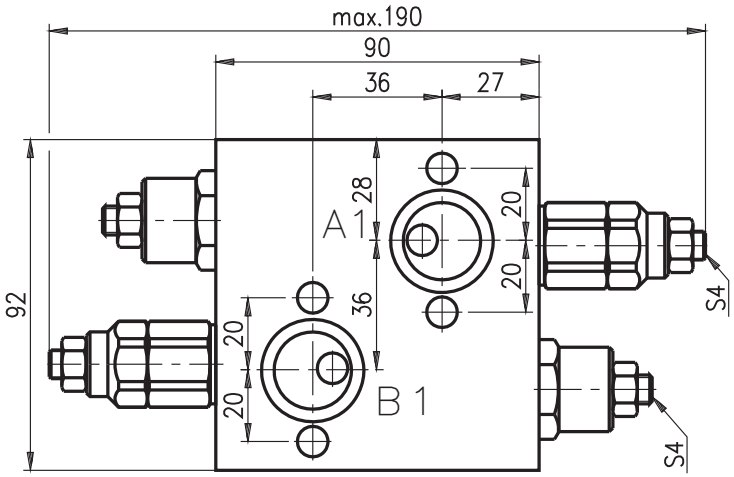

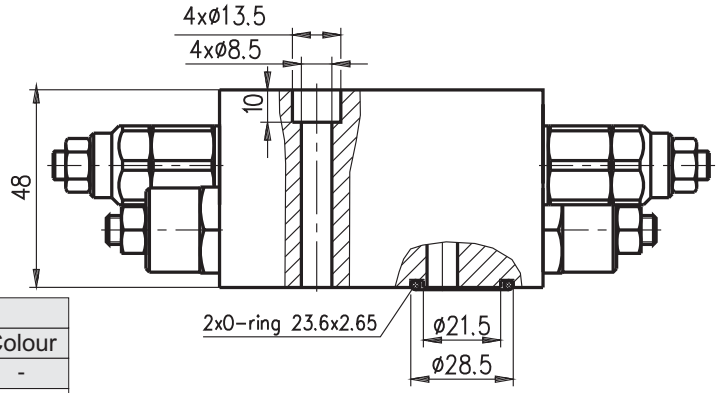

Pressure range of the pressure valve			
Code	Standard setting (Q=5l/min)	Adj. pressure range	Colour
	bar	*bar*	-
10	80	10...100	White
25	180	30...250	Yellow

Code	Adjustments	
A	Leakproof hex. socket screw	
B	Handknob and locknut	
C	Sealing cap	

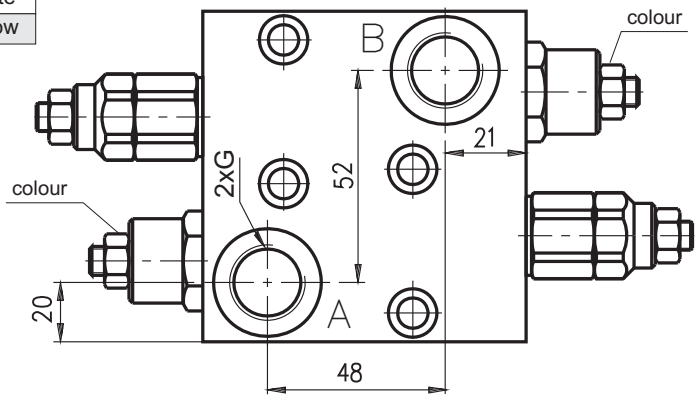

Type	Nominal flow rate	Adj. pressure range	Pressure ratio	Pmax.	Port threads **G**
	L/min	*bar*	-	*bar*	-
BVR 1209	50	60...250	4,25:1	250	G1/2 - DIN 3852

ORDERING CODE

BV R 12 09 / A10 A - B25 A

- **BV** — Type
- **R** — Hydraulic motor type - code: MP or MR - **R**
- **12** — Port threads G - code G1/2 - **12**
- **09** — Code scheme: **09**
- **A10** — Pressure range code valve "A": **10; 25**
- **A** — Code adjustments: **A; B; C** (see table above)
- **B25** — Pressure range code valve "B": **10; 25**
- **A** — Code adjustments: **A; B; C** (see table above)