





**Hidro
Pnevmo
Tehnika**

3, Eng. Felix Vozhely St.,
6100 Kazanlak, Bulgaria
Tel.: +359 431 62 228
+359 431 68 440
e-mail: info@hpt-bg.com
www.hpt-bg.com


SOLENOID OPERATED DIRECTIONAL CONTROL VALVE

. RS10 .. / .. -2

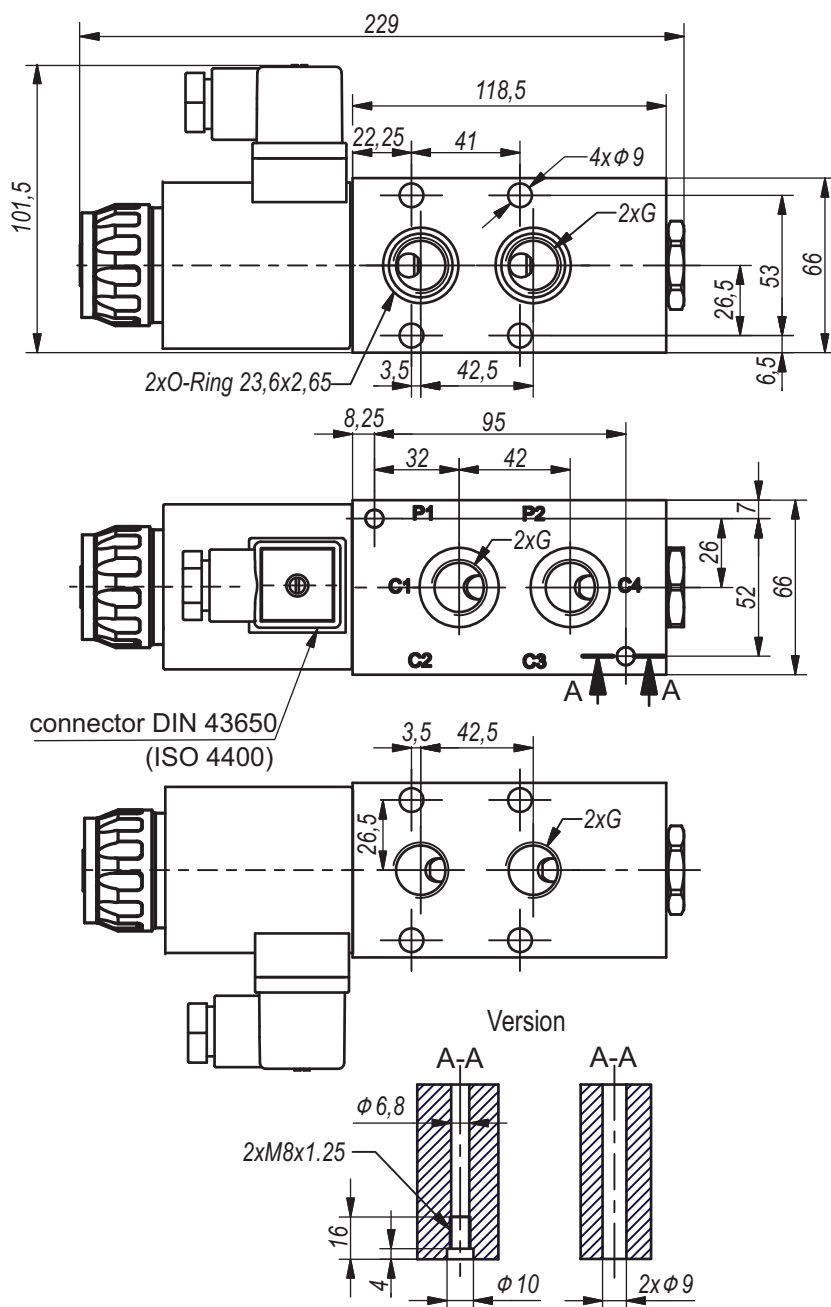

connector DIN 43650
(ISO 4400)

Operating limit

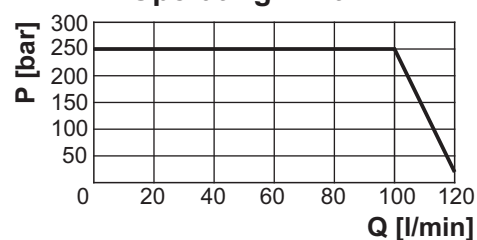

Internal leakage - 30 cm³/min
mineral oil with 46 cSt viscosity
and at 100 bar pressure

TECHNICAL DATA

General		
Ambient temperature	°C	-20...+50
Hydraulic		
Maximal pressure	bar	250
Maximal flow rate	L/min	100
Working fluid - mineral oil		
- viscosity	mm ² /s	10...100
- filtration level	µm	25 or better
- temperature	°C	-20...+80
Power supply		
Voltage	V DC	12±5%
		24±5%
	V AC	110/50Hz
		220/50Hz

Note:

1. All performances and calibration are carried out by using hydraulic oil with viscosity approx 46 cSt at 50 °C.
2. Tightening torque for the solenoid - 30 N.m.

ORDERING CODE

RS10 .. / 12 . - 2

Series

Type	Port threads "G" - code G1/2" - omit	Operating voltage - code: 12V / 00Hz - 12 24V / 00Hz - 24 110V/50Hz - 110 220V/50Hz - 220	Version - code: 2xM8 - omit 2xØ9 - B
------	---	---	--