






**Hidro  
Pnevmo  
Tehnika**

3, Vojvodi St., Kazanlak, Bulgaria  
Tel.: +359 431/62 228  
Fax.: +359 431/62 019  
e-mail: [info@hpt-bg.com](mailto:info@hpt-bg.com)  
[www.hpt-bg.com](http://www.hpt-bg.com)

## HYDRAULIC MOTOR BLOCKS TYPE BV



### BVS ...10/... -1

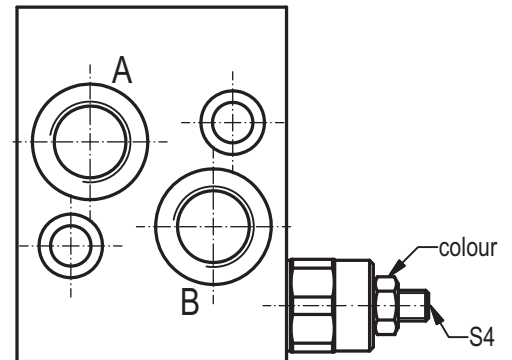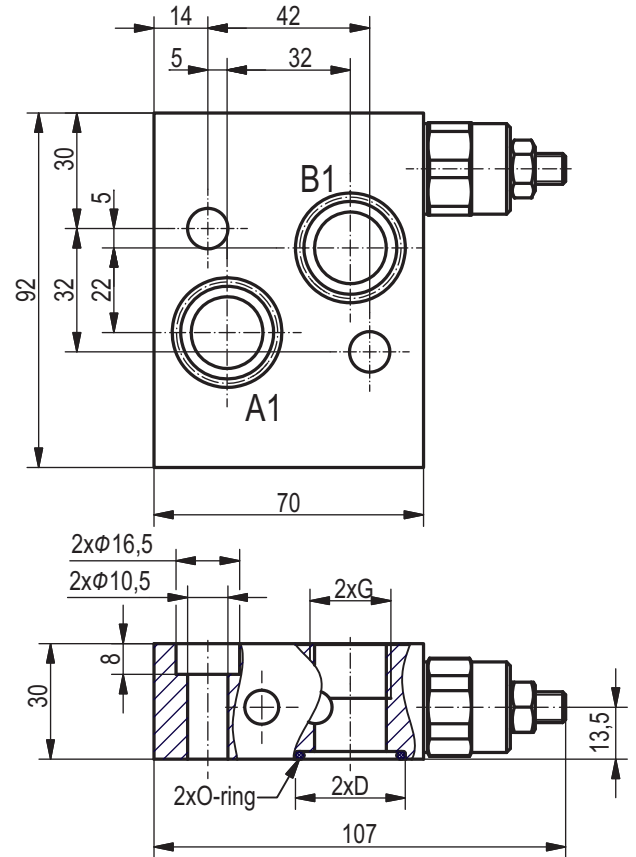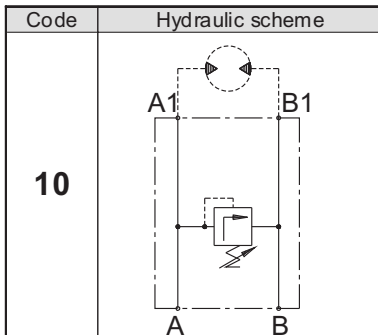

Pressure range			
Code	Standard setting (Q=5l/min)		Colour
	bar	Adj. pressure range bar	
<b>10</b>	80	10...100	White
<b>25</b>	180	30...250	Yellow

Code	Adjustment
<b>A</b>	Leakproof hex. socket screw
<b>B</b>	Handknob and locknut
<b>C</b>	Sealing cap

Type	Nom. flow rate	P <sub>max.</sub>	Port threads G	D	O-ring
	L/min	bar	-	mm	-
<b>BVS 1210 /... -1</b>	60	250	G1/2 - DIN 3852	28,5	23,6x2,65
<b>BVS 7810 /... -1</b>	60	250	7/8-14 UNF - ISO 11926	29,3	26x2
<b>BVS 2210 /... -1</b>	60	250	M22x1,5 - DIN 3852	28,5	23,6x2,65

### ORDERING CODE

**BV S 12 10 ... / 10 A - 1**

