



**Hidro  
Pnevmo  
Tehnika**

3, Vojeli St., Kazanlak, Bulgaria  
Tel.: +359 431/ 62 228, 68 440  
e-mail: info@hpt-bg.com  
www.hpt-bg.com

## IN-LINE SINGLE OVERCENTER VALVE

**OWC/SE-34/..**

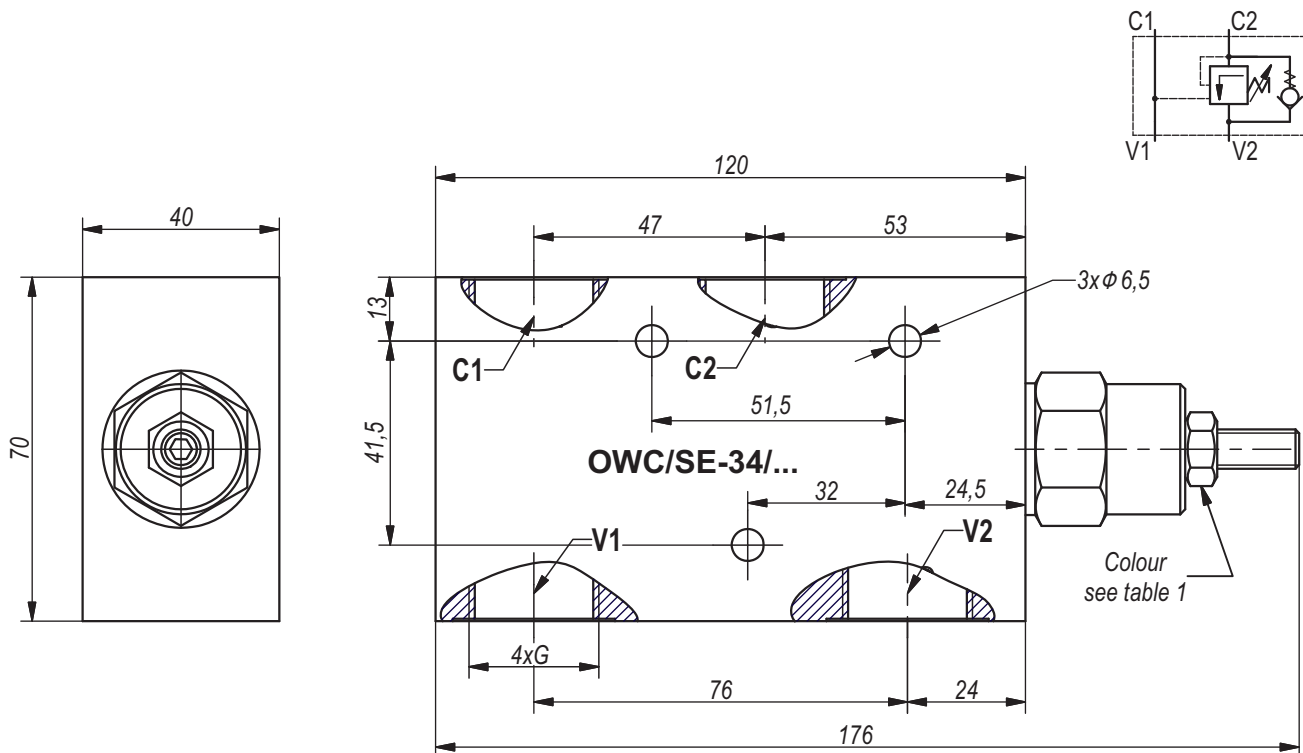
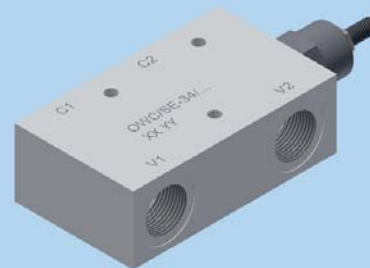


Table 1

Code	Pressure range		Pilot ratio	Colour
	Standard setting (Q=5l/min) bar	Adj. pressure range bar		
25	100	60...250	4,26:1	White
35	250	100...350	4,26:1	Yellow

Table 2

Type	Q <sub>nom.</sub>	G	H	Body material
	L/min.			
OWC/SE-34/25	100	G3/4"-DIN 3852	40	Aluminum
OWC/SE-34/25L	100	G3/4"-DIN 3852	40	Brass
OWC/SE-34/35	100	G3/4"-DIN 3852	35	Steel

All performances and calibration are carried out by using hydraulic oil with viscosity approx. 46 cSt at 50°C.

**Working fluid** - mineral oil with:  
- viscosity - 10...100 cSt;  
- temperature - -20...+80°C;  
- filtration level - 25 μm.

### ORDERING CODE

**OWC/SE - 34 / 25 L**

